

astro

**LIGHTING
COLLECTION**

2021

Introduction

Since 1997, our Founders John Fearon and James Bassant, have shared a passion for British lighting design and a vision to create products with distinctive quality. Obsessive over the details, we refine elements others may overlook, challenging ourselves so we get it just right.

Future-proofed by design, timeless, pared-down aesthetics are what we're known for, using the best possible materials and techniques to make each product uniquely Astro. Balancing high-performance with our commitment to sustainable design, our in-house creative team fuse form with function so every product is created to stand the test of time.

IT Dal 1997, i nostri fondatori John Fearon e James Bassant condividono la passione per il design illuminotecnico inglese ed una vision per la creazione di prodotti con una qualità distintiva. Perfezioniamo elementi che altri possono a volte non considerare, grazie ad una cura maniacale dei dettagli e sfidiamo costantemente noi stessi per ottenere sempre ottimi risultati. Design a prova di futuro ed estetica senza tempo ed essenziale sono ciò che ci contraddistingue: utilizziamo i materiali e le tecniche migliori in grado di rendere ogni prodotto distintamente Astro. Bilanciando elevate prestazioni con il nostro impegno verso il design sostenibile, il nostro team creativo interno coniuga forma e funzionalità permettendo ad ogni prodotto di superare la prova del tempo.

FR Depuis 1997, nos fondateurs, John Fearon et James Bassant, partagent une passion pour la conception des éclairages britanniques et une vision pour créer des produits de qualité unique. Avec un sens obsessif du détail, nous affinons nos processus et des éléments que d'autres pourraient négliger, en relevant le défi de créer la solution la plus aboutie. Une esthétique épurée et intemporelle, à l'épreuve du temps, sont les bases de notre réputation. Grâce à notre choix des meilleurs matériaux et techniques, chacun de nos produits est reconnaissable comme une création Astro unique. Équilibrant des performances de haut niveau et notre engagement pour créer des conceptions durables, notre équipe créative interne fusionne forme et fonction afin que chaque produit résiste à l'épreuve du temps.

DE Unsere Gründer John Fearon und James Bassant teilen seit 1997 eine Leidenschaft für britisches Beleuchtungsdesign und eine Vision zur Herstellung von Produkten von unverwechselbarer Qualität. Wir sind detailbesessen, veredeln Elemente, die andere womöglich übersehen, und stellen höchste Ansprüche an uns selbst für optimale Ergebnisse. Wir sind bekannt für eine bewusst zukunftsorientierte, zeitlos schlichte Ästhetik und verwenden ausschließlich bestmögliche Materialien und Techniken. Jedes Produkt ist unverkennbar Astro. Unser internes Kreativteam verbindet hohe Leistung mit einem Bekenntnis zu nachhaltigem Design und verschmilzt Form und Funktion so zu einem Produkt, das die Zeit überdauert – jedes Mal.



Projects



We are proud to play our part in some of the most exciting design projects across the globe. Working closely with our customers and partners, we deliver contemporary, purposeful designs that complement every aspect of luxury living and hospitality, from guest bedrooms and bathrooms to living areas, corridors, and exteriors.

IT Siamo orgogliosi di aver partecipato ad alcuni dei progetti di design più straordinari al mondo. Collaborando strettamente con clienti e partner, forniamo prodotti mirati dallo stile contemporaneo che si adattano ad ogni aspetto di ambienti di lusso ed hotel, dalle camere e sale da bagno degli ospiti, fino alle zone living, corridoi ed esterni.

FR Nous sommes fiers de jouer un rôle dans de nombreux projets de design parmi les plus passionnants au monde. En travaillant en étroite collaboration avec nos clients et nos partenaires, nous créons des designs contemporains et pratiques qui complètent chaque aspect d'un style de vie luxueux, résidentiel ou hôtelier, depuis les chambres, les salles de bain, les espaces de vie, jusqu'aux couloirs et espaces extérieurs.

DE Wir sind stolz auf unsere Beteiligung bei einigen der aufregendsten Designprojekte weltweit. In enger Zusammenarbeit mit unseren Kunden und Partnern liefern wir zeitgemäße, zweckmäßige Designs, die alle Aspekte luxuriöser Lebensführung und der Hotellerie komplementieren: von Gäste- und Badezimmern bis hin zu Wohnbereichen, Fluren und Außenbereichen.




Top Zeppo Pendant 400
Repco HQ, Australia
Left Altea 360 LED
Hard Rock Hotel, UK
Right Enna Square
The Warehouse Hotel,
Singapore

The Collection


BATHROOM




TACOMA
P. 17



CABARET
P. 19




VERSAILLES
P. 21



EPSILON
P. 23




KAPPA
P. 23



KYOTO LED
P. 25



SAGARA
P. 27



MASCALI ROUND
P. 29

INTERIOR



CONE 195 + LAGO 280
P. 33



AVIGNON
P. 35



HASHIRA 300 + 400
P. 37



CAMBRIA 180
P. 39



MIURA WALL
P. 41



MIURA SWING ARM
P. 41



SIDE BY SIDE
P. 43



MITSU WALL
P. 45



MITSU SWING ARM
P. 45



EDGE READER MINI
P. 47



ZEPP0 READER
P. 49



ENNA SURFACE USB
P. 51



LUCCA
P. 53



FUSE 3
P. 55



BLEND
P. 57



AMAS
P. 59



AMAT
P. 59



PARALLEL
P. 61



MILO 300
P. 63



MITSU FLOOR
P. 65



MITSU TABLE
P. 65



MIURA DESK USB
P. 67



ATELIER DESK
P. 69



HASHIRA PENDANT
P. 71



HASHIRA SURFACE
P. 71



CAMBRIA PENDANT
P. 73



PINHOLE
P. 75



TRIMLESS
P. 77



MINIMA
P. 79



APOLLO
P. 81



ASCOLI TWIN
P. 83



ASCOLI FLUSH
P. 85



CAN 50 FLUSH
P. 85

EXTERIOR



MESSINA 200
P. 89



MESSINA TWIN
P. 89



HARVARD LANTERN
P. 91



HARVARD PENDANT
P. 93



HOMEFIELD PEDESTAL
P. 95



KURO 250
P. 97



KURO 450
P. 97



AVA 400
P. 99



INCLINE
P. 101



INCLINE TWIN
P. 101



MYOS
P. 103



BAYVILLE 900
P. 105



BAYVILLE 900 TWIN
P. 105



JURA SPOT
P. 107



JURA SPIKE SPOT
P. 107



Hashira Collection

Hashira 300

Hashira 400

Hashira surface 250

Hashira pendant



Miura Collection

Miura swing arm

Miura wall

Miura desk USB



Mitsu Collection

Mitsu wall

Mitsu swing arm

Mitsu table

Mitsu floor



Cambria Collection

Cambria 180

Cambria 380

Cambria 480

Cambria 580

Cambria pendant

See pages 39 + 73
Please see website for full range

Bathroom




Tacoma



Single



Twin



Single Grande



Tacoma shade options



Single 3W Max LED G9 excl.

Single grande 3W Max LED G9 excl.

Twin 2 X 3W Max LED G9 excl.

IP44 Zone 2, 3 Class I





Technical data p. 117 + 118



Cabaret



5 II

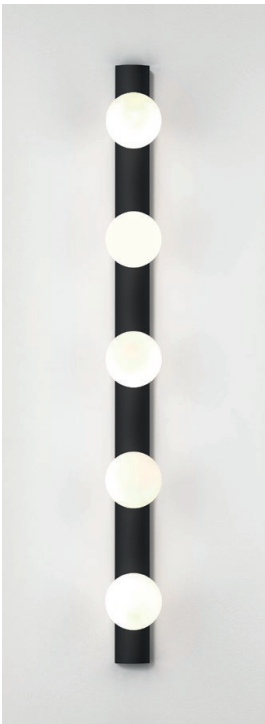

4 II

MB PCh

4 II 4 x 3W Max LED G9 excl.
 5 II 5 x 3W Max LED G9 excl.
 IP44 Zone 2, 3 Class II



Technical data p. 110



250



400



600



370

Versailles phase dimmable



250

Br PCh MG

250 Integral 4.5W LED 3000K 320Lm 80CRI
400 Integral 7.1W LED 3000K 658Lm 80CRI
IP44 Zone 2, 3 Class II
Mains 230V



Technical data p. 119

Epsilon



Kappa



Epsilon + Kappa matt black



Kappa



Epsilon PCh



Kappa PCh


MB

Epsilon Integral 3.4W LED 3000K 83Lm 90CRI
Kappa Integral 3.4W LED 3000K 98Lm 90CRI
IP44 Zone 2, 3 Class II
Mains 230V

Technical data p. 111 + 113



Kyoto LED matt black

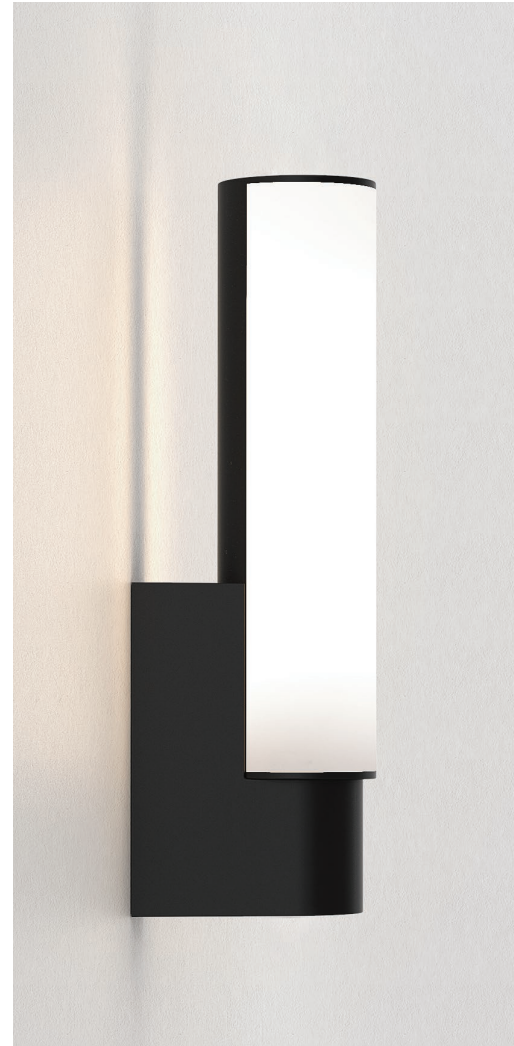

PCh

MB

Integral 7.9W LED
2700K 318Lm 80CRI
IP44 Zone 2, 3 Class II
Mains 230V

Technical data p. 113



Sagara matt black



PCh

MB

3W Max LED G9 excl.
IP44 Zone 2, 3 Class II




Technical data p.117

Mascali Round matt black



MN



PCh

MB

Integral 5.3W LED
2700K 76Lm 90CRI
IP44 Zone 2, 3 Class II
Mains 230V






Technical data p. 114

Interior



Cone 195 + Lago 280

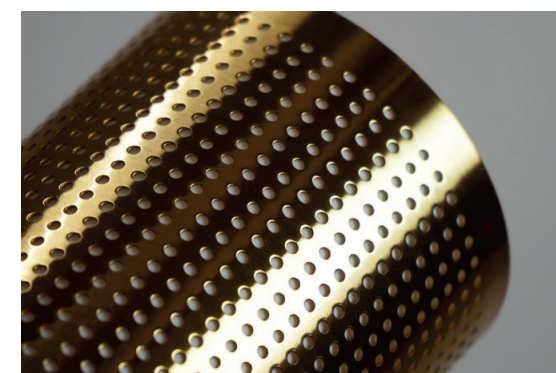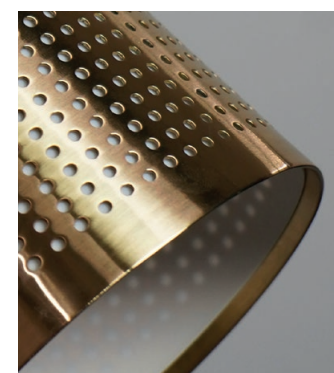

WG + WF

NB

Cone 195 shade is compatible
with the Lago 280 (sold separately)

Technical data p. 113



Round 375



Round 525



Square 300



Square 500



Avignon



Br AB

Round 375 12W Max LED E27/ES excl.

Round 525 2 X 12W Max LED E27/ES excl.

Square 300 12W Max LED E27/ES excl.

Square 500 2 X 12W Max LED E27/ES excl.


IP20 Class I



Technical data p. 109




Hashira 300 + 400

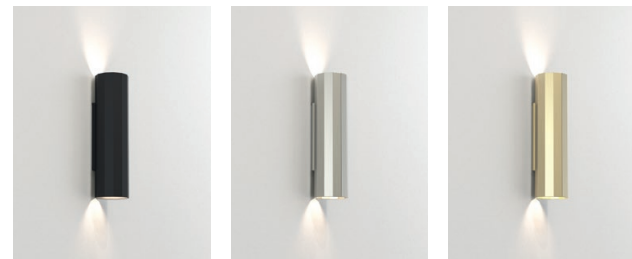

300



400

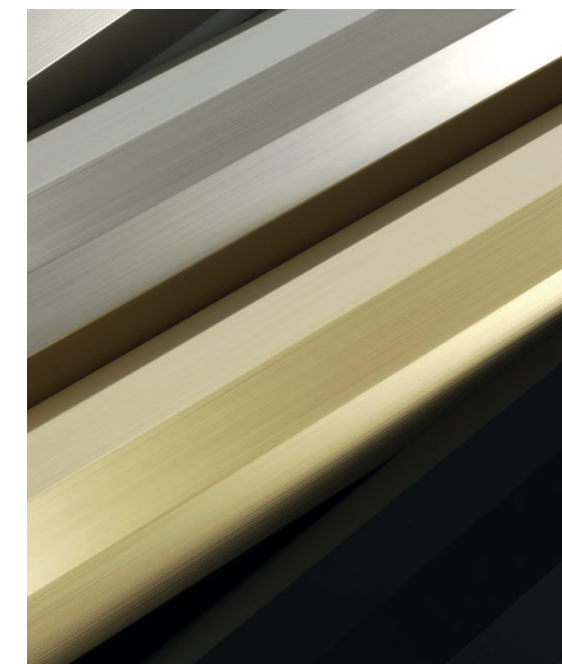

MB MN MG

2 x 6W Max LED GU10 excl.
IP20 Class I



Pendant + Surface 250

Technical data p. 111 + 112

Cambria 180 + backplate 3



Backplate 3

12W Max LED E27/ES excl.

IP20 Class I

Shades sold separately



Cambria collection

Technical data p. 110



Miura wall + swing arm



Wall



Swing arm




MB MN MG

Integral 7.5W LED
IP20 Class I
Shades sold separately



Desk USB



Cone 105 shade

Technical data p. 115 + 116



Side by Side grande USB




MB MN Br

12W Max LED E27/ES excl. + integral 3.6W LED
2700K 134Lm 9090CRI
IP20 Class I
Shades sold separately



Without USB





Tapered round
250 shade

Technical data p. 117

Mitsu wall + swing arm



Table + Floor



Cone 173 shade

MN Br


12W Max LED E27/ES excl.
IP20 Class I
Shades sold separately



Technical data p. 115




Edge Reader Mini

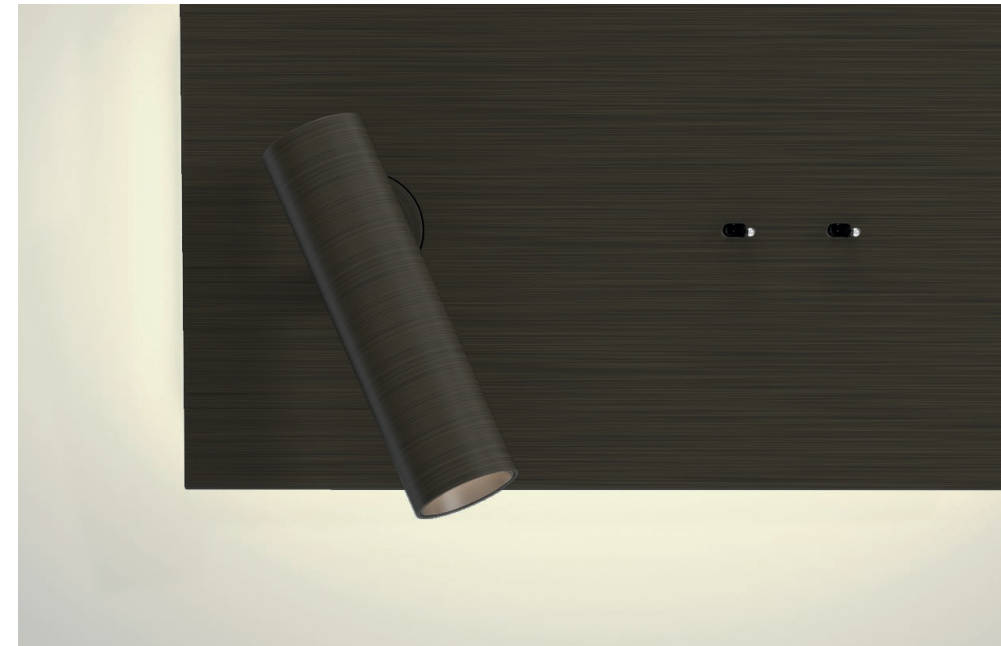

MB + MW



Edge reader



MN Br

Integral 9.7W + 4.1W LED
2700K 112 + 149Lm 80 + 90CRI
IP20 Class I
Mains 230V



Technical data p. 111




Zeppo reader



MB MN MW

3W Max LED G9 excl. + integral 4.1W LED
2700K 149Lm 90CRI
IP20 Class I
Mains 230V


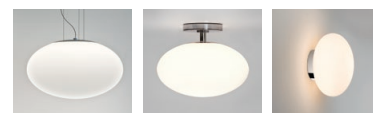


Zeppo collection

Technical data p. 119



Enna Surface USB

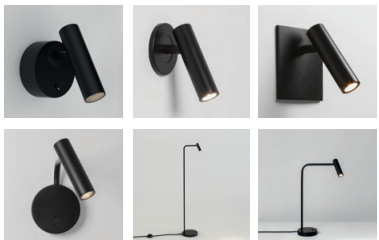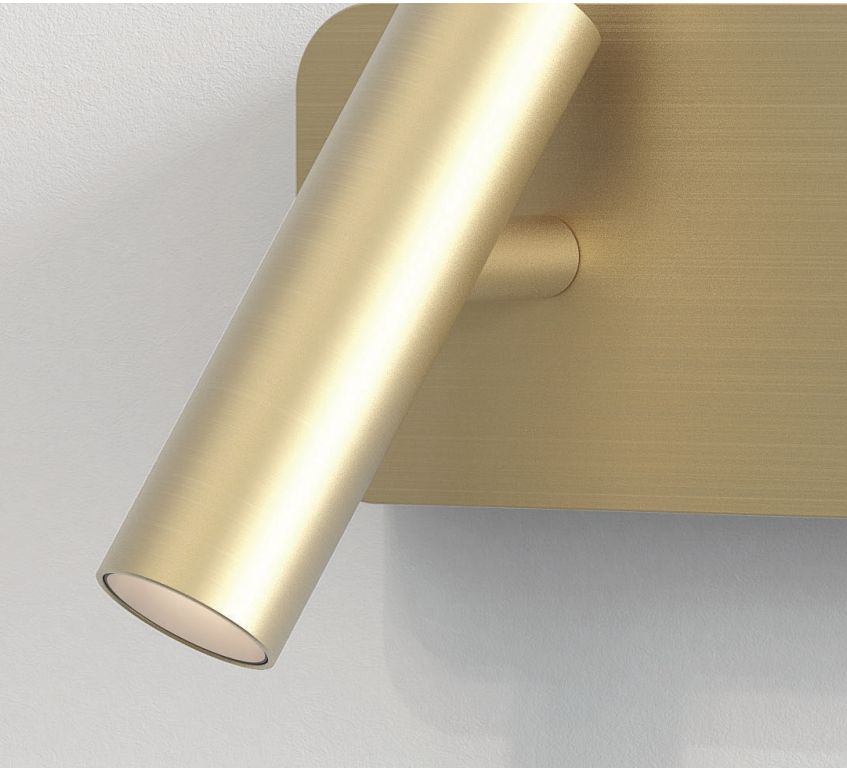

Enna collection

MB	MN	MG	MW
----	----	----	----

Integral 3.6W LED
 2700K 134Lm 90CRI
 IP20 Class I
 Mains 230V



Technical data p. 111



Lucca



Surface



Unswitched



Recessed



Unswitched



MB MN MG Br

Integral 3.6W LED
2700K 124Lm 90CRI
IP20 Class I
Mains 230V



The Lucca Surface and Recessed unswitched variants are available by special order. A minimum order quantity of 100pcs applies.

Technical data p. 113



Fuse 3



MB	MN	MG	Br	PCh	MW
----	----	----	----	-----	----

Integral 3.6W LED
2700K 151Lm 90CRI
IP20 Class I
Mains 230V



USB

Technical data p. 111



Blend



P

12W Max LED E27/ES excl.
IP20 Class I




Technical data p. 110

Amas + Amat 320



Amat 320

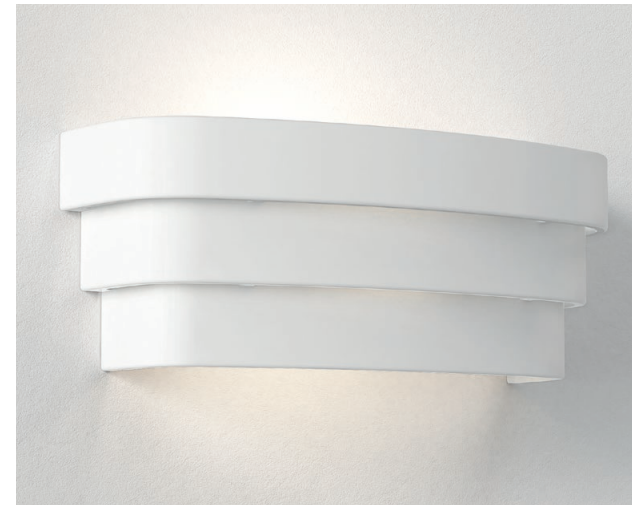

Amas 320



Amat 320




12W Max LED E27/ES excl.
IP20 Class II



Technical data p. 108



Parallel

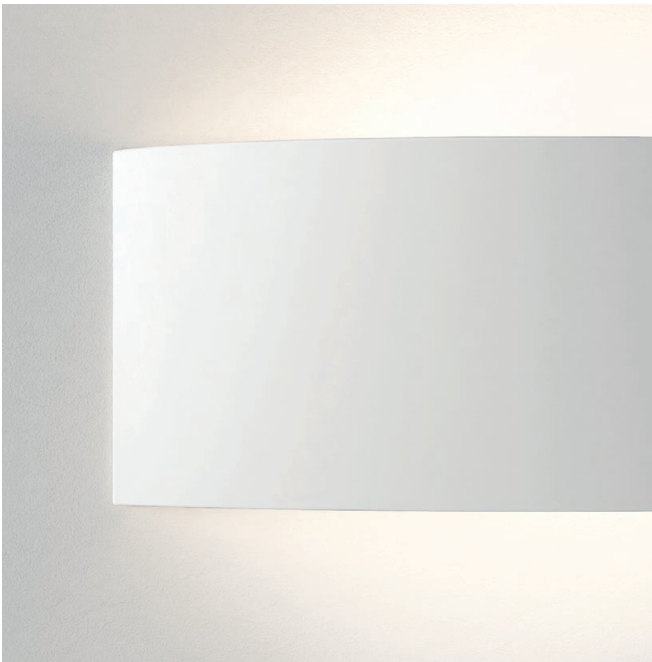

c

12W Max LED E27/ES excl.
IP20 Class II



Technical data p. 116



Milo 300




GW

12W Max LED E27/ES excl.
IP20 Class II



Technical data p. 114

Mitsu table + floor

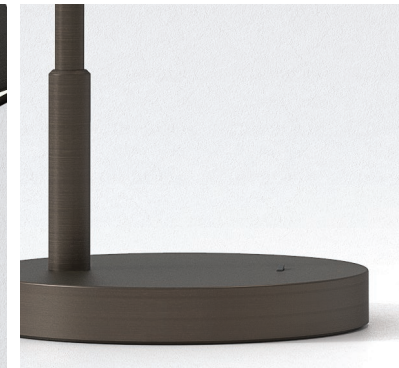


MN Br

12W Max LED E27/ES excl.
IP20 Class I
Shade sold separately



Wall + Swing arm



Cone 173 shade


Technical data p. 115



Miura desk USB



Wall + Swing arm



Cone 105 shade

MN MG

Integral 7.5W LED
2700K 367Lm 80CRI
IP20 Class II
Mains 230V
Shade sold separately



Technical data p. 115




Atelier desk




MB MW

12W Max LED E27/ES excl.
IP20 Class II

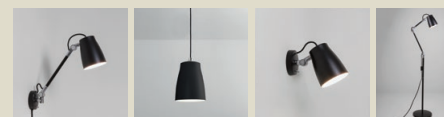


Atelier collection

Technical data p. 109

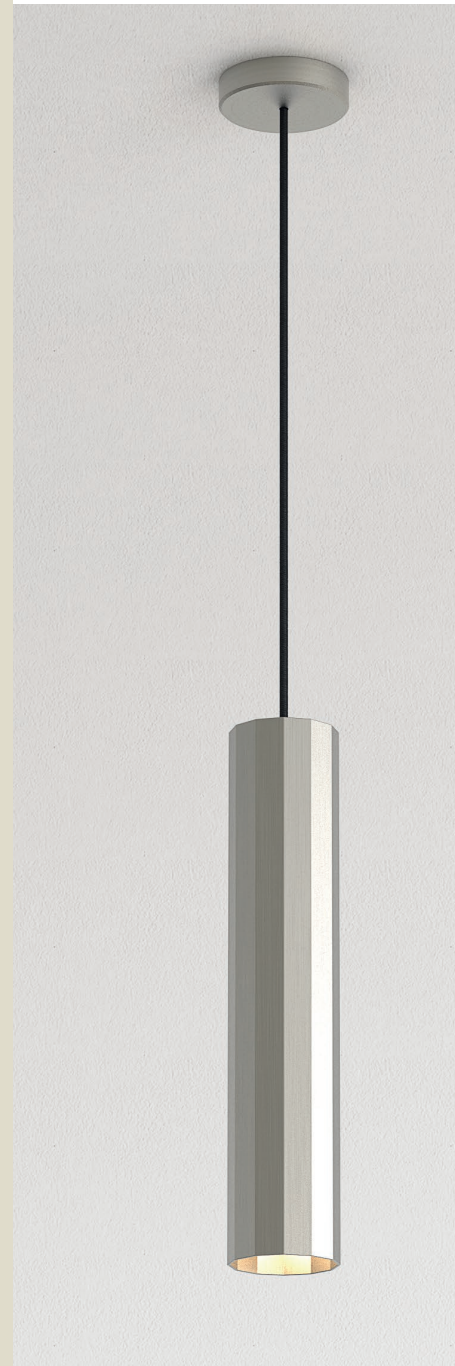


Hashira pendant + surface 250

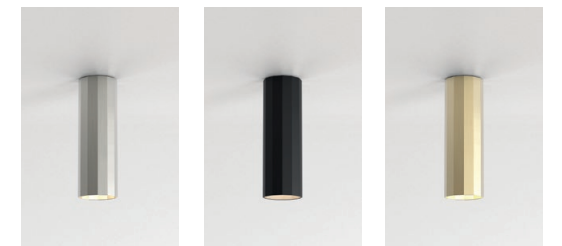

Surface 250

MB MN MG

6W Max LED GU10 excl.
IP20 Class I



Hashira 300 + 400

Technical data p. 112



Cambria pendant



600



Pendant


Shades



500



600



Cambria collection

MN MW

3 X 12W Max LED E27/ES excl.

IP20 Class I

Shades sold separately



Technical data p. 110



Pinhole



Slimline fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline flush fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline flush adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min



Twin + Triple adjustable
2 x 6W Max + 3 x 6W Max LED GU10
IP20 Zone 3
Class II

MW





Trimless



Slimline fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min



Fixed
6W Max LED GU10
IP20 Zones 3
Class II



Adjustable
6W Max LED GU10
IP20 Zone 3
Class II



Twin adjustable
2 x 6W Max LED GU10
IP20 Zone 3
Class II

MW





Minima



Slimline fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90min



Slimline 25 fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min



MB MW






Apollo



MB MW

6W Max LED GU10 excl.
IP20 Class I



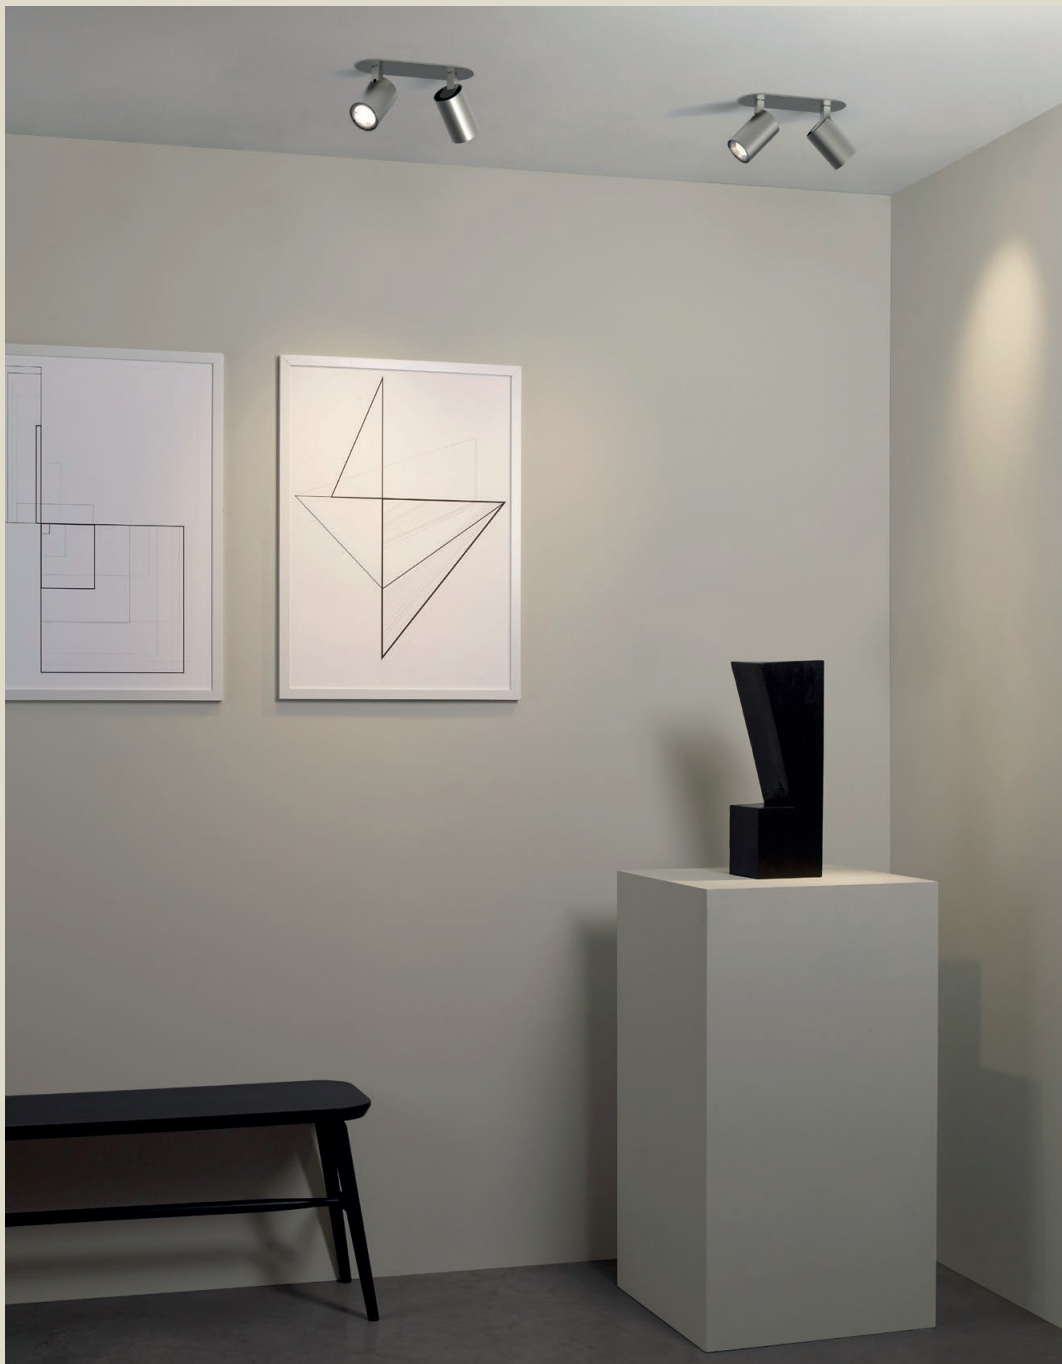

Ascoli twin recessed



2 x 6W Max LED GU10 excl.
IP20 Class I




Ascoli collection

Technical data p. 109

Ascoli flush fire rated



Can 50 flush fire rated

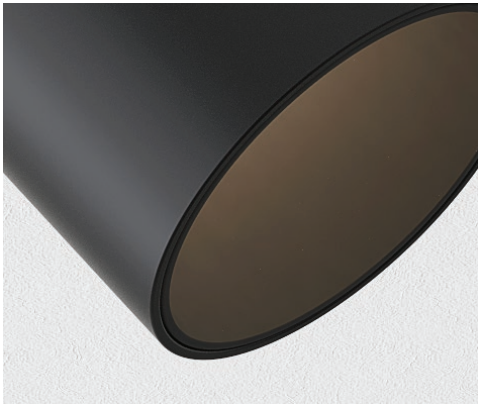

Can collection



Ascoli collection

Ascoli + Can 50 flush fire-rated



MB TW

Ascoli flush fire rated
6W Max LED GU10 excl.
IP20 Class I
Fire rated: 30 min, 60 min & 90 min



MB MW

Can 50 flush fire rated
Integral 7.5W LED
IP20 Class I
Fire rated: 30 min, 60 min & 90 min



Exterior



Messina 200 + twin



Messina collection

TB

200 12W Max LED E27 excl.
Twin 2 x 12W Max LED E27 excl.
IP44 Class I



Technical data p. 114



Harvard lantern



TB

12W Max LED E27 excl.
IP44 Class I



Harvard collection

Technical data p. 112



Harvard pendant



TB

12W Max LED E27 excl.
IP44 Class I



Harvard collection

Technical data p. 111




Homefield pedestal



TB

12W Max LED E27 excl.
IP44 Class I

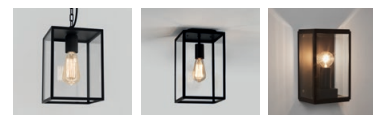

Homefield collection

Technical data p.112



250



450



Kuro 250 + 450



TB



Integral 1.3W LED
2700K 145Lm 80CRI
IP44
Solar powered 5V



USB charging plug available separately

Technical info p. 113

Ava 400

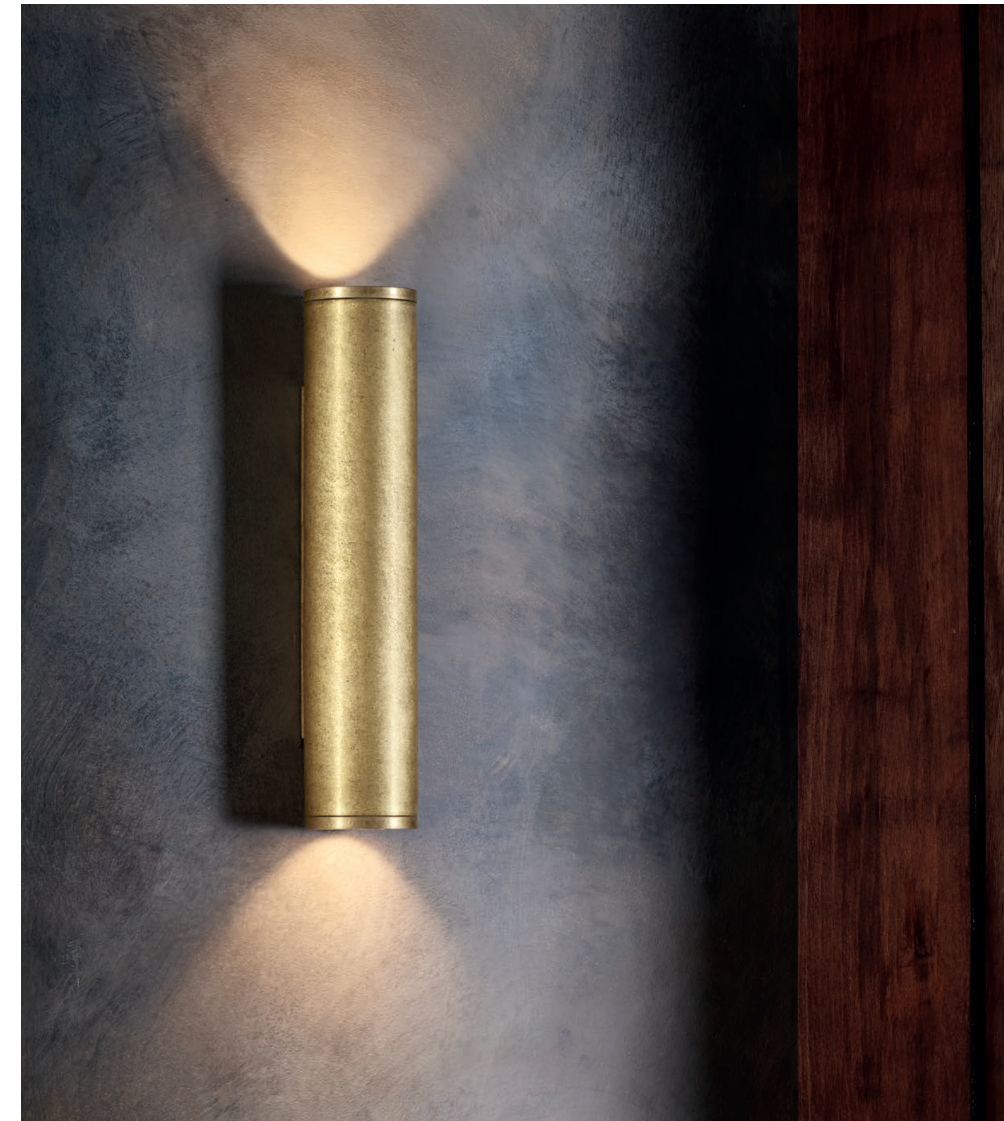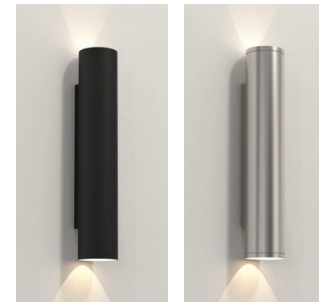

TB BSS CB

2 x 6W Max LED GU10 excl.
IP44 Class I



200 + 300

Technical data p. 109



Incline single + twin



CB

Single Integral 8.2W LED 3000K 485Lm 80CRI

Twin Integral 14.2W LED 3000K 1075Lm 80CRI

IP65 Class I

Mains 230V



Technical data p. 112



Myos



Extension pole

TB

Integral 8W LED
3000K 312Lm 90CRI
IP65
700mA constant current driver required
Extension pole sold separately



Technical data p. 116



Bayville spike spot 900 + 900 twin



Bayville
collection

TB

900 Integral 8.1W LED 3000K 490Lm 80CRI

900 twin Integral 15.7W LED 3000K 1070Lm 80CRI

IP66 Class I

Mains 230V



Technical data p. 110



Jura single spot + spike spot



Single spot

CB

6W Max LED GU10 excl.

Single IP44 Class I

Spike spot IP65 Class I



Jura collection

Technical data p. 112

	AMAS 320 P.59					
	Interior	Unswitched	Ceramic	○ C	1431001	
	12W Max LED E27/ES excl.	IP20	1.36kg			
	Max lamp length 120mm	CE Class II	Horizontal wall mount			
	Dimmable	No driver required				🔥
	AMAT 320 P.59					
	Interior	Unswitched	Ceramic	○ C	1432001	
	12W Max LED E27/ES excl.	IP20	1.35kg			
	Max lamp length 120mm	CE Class II	Horizontal wall mount			
	Dimmable	No driver required				🔥
	APOLLO 100 RECESSED P.81					
	Interior	CE Class I	Tilt adjustable angle 90°	○ TW	1422016	
	6W Max LED GU10 excl.	No driver required	Rotation adjustable angle 330°	● MB	1422017	
	Max lamp length 73mm	Aluminium	Round cut out: Ø44mm			
	Dimmable	0.44kg	Recess depth: 55mm			
	APOLLO TRACK P.81					
	Interior	IP20	0.34kg	○ TW	1422022	
	6W Max LED GU10 excl.	CE Class II	Ceiling track mount	● MB	1422023	
	Max lamp length 79mm	No driver required	Tilt adjustable angle 90°			
	Dimmable	Aluminium	Rotation adjustable angle 330°			🔥
	APOLLO SINGLE P.81					
	Interior	IP20	0.57kg	○ TW	1422001	
	6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● MB	1422002	
	Max lamp length 79mm	No driver required	Tilt adjustable angle 90°			
	Dimmable	Aluminium	Rotation adjustable angle 330°			🔥
	APOLLO TWIN P.81					
	Interior	IP20	1.44kg	○ TW	1422004	
	2 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● MB	1422005	
	Max lamp length 79mm	No driver required	Tilt adjustable angle 90°			
	Dimmable	Aluminium	Rotation adjustable angle 330°			🔥
	APOLLO TRIPLE BAR P.81					
	Interior	IP20	2.11kg	○ TW	1422007	
	3 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● MB	1422008	
	Max lamp length 79mm	No driver required	Tilt adjustable angle 90°			
	Dimmable	Aluminium	Rotation adjustable angle 330°			🔥
	APOLLO FOUR BAR P.81					
	Interior	IP20	3.41kg	○ TW	1422010	
	4 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● MB	1422011	
	Max lamp length 79mm	No driver required	Tilt adjustable angle 90°			
	Dimmable	Aluminium	Rotation adjustable angle 330°			🔥
	APOLLO FIVE BAR P.81					
	Interior	IP20	4.45kg	○ TW	1422013	
	5 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● MB	1422014	
	Max lamp length 79mm	No driver required	Tilt adjustable angle 90°			
	Dimmable	Aluminium	Rotation adjustable angle 330°			🔥

	ASCOLI FLUSH FIRE-RATED P.85					
	Interior	CE Class I	Rotation adjustable angle 330°	○ TW	1286095	
	6W Max LED GU10 excl.	No driver required	Round cut out: Ø79mm	● MB	1286096	
	Max lamp length 57mm	Mild steel	Recess depth: 60mm			
	Dimmable	0.53kg	Install into new ceiling			
	ASCOLI TWIN RECESSED P.83					
	Interior	CE Class I	Rotation adjustable angle 330°	○ TW	1286097	
	2 X 6W Max LED GU10 excl.	No driver required	Oval cut out: 184mm x 44mm	● MB	1286100	
	Max lamp length 57mm	Mild steel	Recess depth: 80mm	● MN	1286099	
	Dimmable	0.9kg	Plaster board installation only	● Br	1286098	
	ATELIER DESK P.69					
	Interior	Switched	3.5kg	● MB	1224061	
	12W Max LED E27 excl.	IP20	Tilt adjustable angle 180°	○ MW	1224062	
	Max lamp length 115mm	CE Class II	Rotation adjustable angle 330°			
	Not dimmable	Aluminium	Wire length 3000mm			
	AVA 400 P.99					
	Outdoor	Unswitched	TB-Aluminium/BSS-Stainless Steel	● TB	1428013	
	2 X 6W Max LED GU10 excl.	IP44	/CB-Brass	● BSS	1428014	
	Max lamp length 79mm	CE Class I	TB-1.3kg/BSS-2.5kg/CB-2.7kg	● CB	1428015	
	Dimmable	No driver required	Vertical wall mount			🔥
	AVIGNON ROUND 375 P.35					
	Interior	Unswitched	Zinc	● Br	1427001	
	12W Max LED E27/ES excl.	IP20	3.34kg	● AB	1427002	
	Max lamp length 145mm	CE Class I	Vertical wall mount			🔥
	Dimmable	No driver required				🔥
	AVIGNON ROUND 525 P.35					
	Interior	Unswitched	Zinc	● Br	1427003	
	2 x 12W Max LED E27/ES excl.	IP20	4.5kg	● AB	1427004	
	Max lamp length 145mm	CE Class I	Vertical wall mount			🔥
	Dimmable	No driver required				🔥
	AVIGNON SQUARE 300 P.35					
	Interior	Unswitched	Zinc	● Br	1427009	
	12W Max LED E27/ES excl.	IP20	3.56kg	● AB	1427010	
	Max lamp length 145mm	CE Class I	Vertical wall mount			🔥
	Dimmable	No driver required				🔥
	AVIGNON SQUARE 500 P.35					
	Interior	Unswitched	Zinc	● Br	1427011	
	2 x 12W Max LED E27/ES excl.	IP20	5.52kg	● AB	1427012	
	Max lamp length 145mm	CE Class I	Vertical wall mount			🔥
	Dimmable	No driver required				🔥

	BAYVILLE SPIKE SPOT 900 P.105				
	Exterior	No driver required	3-step Macadam ellipse	● TB	1401012
	Integral 8.1W LED	Aluminium	LED lifetime 40,000 hrs		
	490LM 3000K 80CRI	1.46kg	Supply frequency 50/60 Hz		
	Dimmable: phase leading + trailing	Ground / Floor installation	Supply voltage 210-250V		
	Unswitched	Tilt adjustable angle 90°	Driver lifetime 40,000 hrs		
	IP66	Rotation adjustable angle 330°	Efficacy 60.5 lm/W		
	CE Class I	Beam angle 35°	Trailing wire 2,500mm		

	BAYVILLE SPIKE SPOT 900 TWIN P.105				
	Exterior	No driver required	3-step Macadam ellipse	● TB	1401013
	Integral 15.7W LED	Aluminium	LED lifetime 40,000 hrs		
	1070LM 3000K 80CRI	1.72kg	Supply frequency 50/60 Hz		
	Dimmable: phase leading + trailing	Ground / Floor installation	Supply voltage 210-250V		
	Unswitched	Tilt adjustable angle 90°	Driver lifetime 40,000 hrs		
	IP66	Rotation adjustable angle 330°	Efficacy 68 lm/W		
	CE Class I	Beam angle 35°	Trailing wire 2,500mm		

	BLEND P.57				
	Interior	Unswitched	Plaster	○ P	1439001
	12W Max LED E27/ES excl.	IP20	2.3kg		
	Max lamp length 120mm	CE Class I	Horizontal wall mount		
	Dimmable	No driver required			

	CABARET 4 II P.19				
	Interior / Bathroom	Unswitched	Mild Steel	● MB	1087007
	4 x 3W Max LED G9 excl.	IP44 Zone 2, 3	1.24kg	● PCh	1087009
	Max lamp length 51mm	CE Class II	Horizontal / Vertical wall mount		
	Dimmable	No driver required			

	CABARET 5 II P.19				
	Interior / Bathroom	Unswitched	Mild Steel	● MB	1087008
	5 x 3W Max LED G9 excl.	IP44 Zone 2, 3	1.57kg	● PCh	1087010
	Max lamp length 51mm	CE Class II	Horizontal / Vertical wall mount		
	Dimmable	No driver required			

	CAMBRIA PENDANT P.73				
	Interior	Unswitched	Mild Steel	○ MW	1421012
	3 x 12W Max LED E27/ES excl.	IP20	1.18kg	● MN	1421013
	Max lamp length 130mm	CE Class I	Ceiling mount		
	Dimmable	Wire length 2000mm	Shade sold separately		

H.180 W.315 D.120	CAMBRIA 180 SHADE / Polycotton / Backplate 3 sold separately (1367003)	WF 5038007	WP 5038010	PF 5038009
H.190 Ø: 500	CAMBRIA 500 SHADE / Polycotton / Diffuser included	WF 5038001	WP 5038003	PF 5038004
H.190 Ø: 600	CAMBRIA 600 SHADE / Polycotton / Diffuser included	WF 5038002	WP 5038005	PF 5038006

	CAN 50 FLUSH FIRE-RATED P.85				
	Interior	Aluminium	Supply frequency 50/60 Hz	○ MW	1396017
	Integral 7.5W LED	0.47kg	Supply voltage 210-250V	● MB	1396018
	525LM 3000K 80CRI	Ceiling installation	Driver lifetime 40,000 hrs		
	Dimmable: phase leading + trailing	Tilt adjustable angle 90°	Efficacy 70 lm/W		
	Unswitched	Rotation adjustable angle 330°	Round cut out: Ø79mm		
	IP20	Beam angle 33.1°	Recess depth: 60mm		
	CE Class I	3-step Macadam ellipse	Fire rating: 30 min, 60 min & 90 min		
	No driver required	LED lifetime 40,000 hrs	EN1365-2		

	EDGE READER MINI P.47				
	Interior	CE Class I	2610-2710K Macadam ellipse	● Br	1352025
	Integral 9.7W + 4.1W LED	No driver required	LED lifetime 53,000 hrs	● MN	1352026
	Reader 112LM 2700K 80CRI	Zinc	Supply frequency 47/63 Hz		
	Backlight 149LM 2700K 90CRI	1.34kg	Supply voltage 100-240V		
	Not dimmable	Horizontal / vertical wall mount	Driver lifetime 20,000 hrs		
	Switched	Tilt adjustable angle 90°	Mains 230V		
	IP20	Rotation adjustable angle 330°	Efficacy 9 lm/W		

	ENNA SURFACE USB P.51				
	Interior	No driver required	3-step Macadam ellipse	● MB	1058153
	Integral 3.6W LED	Zinc	LED lifetime 60,000 hrs	○ MW	1058154
	134LM 2700K 90CRI	1.1kg	Supply frequency 50/60 Hz	● MN	1058155
	Not dimmable	Horizontal / vertical wall mount	Supply voltage 100-277V	● MG	1058156
	Switched	Tilt adjustable angle 90°	Driver lifetime 30,000 hrs		
	IP20	Rotation adjustable angle 330°	Mains 230V		
	CE Class I	Beam angle 18°	Efficacy 37 lm/W		










	EPSILON LED P.23				
	Bathroom	CE Class II	LED lifetime 60,000 hrs	● MB	1124007
	Integral 3.4W LED	No driver required	Supply frequency 50/60 Hz		
	83LM 3000K 90CRI	Zinc	Supply voltage 100-277V		
	Not dimmable	0.69kg	Driver lifetime 30,000 hrs		
	Unswitched	Wall mount - uplight/downlight	Mains 230V		
	IP44	3-step Macadam ellipse	Efficacy 24 lm/W		










	FUSE 3 P.55				
	Interior	Mild Steel	Supply frequency 50/60 Hz	○ MW	1215122
	Integral 3.6W LED	0.8kg	Supply voltage 100-277V	● MB	1215123
	151LM 2700K 90CRI	Horizontal / Vertical wall mount	Driver lifetime 30000 hrs	● PCh	1215124
	Not dimmable	3-step Macadam ellipse	Efficacy 42 lm/W	● MN	1215125
	Switched	Tilt adjustable angle 90°	Oval cut out: 180mm x 54mm	● Br	1215126
	IP20	Rotation adjustable angle 330°	Recess depth: 60mm	● MG	1215127
	CE Class I	Beam angle 18°			
	No driver required	LED lifetime 60000 hrs			

	HARVARD LANTERN P.91				
	Exterior	Unswitched	Stainless Steel	● TB	1402011
	12W Max LED E27/ES excl.	IP44 Zone 2, 3	3.66kg	● FG	6030003
	Max lamp length 270mm	CE Class I	Vertical wall mount		
	Dimmable	No driver required			













	HARVARD PENDANT P.93				
	Exterior	Unswitched	Stainless Steel	● TB	1402013
	12W Max LED E27/ES excl.	IP44 Zone 2, 3	3.36kg	● FG	6030003
	Max lamp length 270mm	CE Class I	Ceiling mount		
	Dimmable	No driver required	Wire length 1800mm		



	HASHIRA 300 P.37				
	Interior	Unswitched	Aluminium	● MB	1442001
	2 x 6W Max LED GU10 excl.	IP20	1.06kg	● MN	1442005
	Max lamp length 80mm	CE Class I	Vertical wall mount	● MG	1442006
	Dimmable	No driver required			

	HASHIRA 400 P.37					
	Interior	Unswitched	Aluminium	● MB	1442002	
	2 x 6W Max LED GU10 excl.	IP20 Zone 3	1.39kg	● MN	1442007	
	Max lamp length 80mm	CE Class I	Vertical wall mount	● MG	1442008	
	Dimmable	No driver required				⚠
	HASHIRA PENDANT P.71					
	Interior	Unswitched	Aluminium	● MB	1442004	
	6W Max LED GU10 excl.	IP20	1.92kg	● MN	1442011	
	Max lamp length 80mm	CE Class I	Ceiling mount	● MG	1442012	
	Dimmable	No driver required	Wire length 2500mm			⚠
	HASHIRA SURFACE 250 P.71					
	Interior	Unswitched	Aluminium	● MB	1442003	
	6W Max LED GU10 excl.	IP20	0.94kg	● MN	1442009	
	Max lamp length 80mm	CE Class I	Ceiling mount	● MG	1442010	
	Dimmable	No driver required				
	HOMEFIELD PEDESTAL P.93					
	Exterior	Unswitched	Stainless steel	● TB	1095036	
	12W Max LED E27/ES excl.	IP44	4.47kg			
	Max lamp length 170mm	CE Class I	Pedestal mount			
	Dimmable	No driver required				ⓘ ⚠
	INCLINE SINGLE P.101					
	Exterior	No driver required	LED lifetime 42,300 hrs	● CB	1419002	
	Integral 8.2W LED	Brass	Supply frequency 50/60 Hz			
	485LM 3000K 80CRI	1kg	Supply voltage 220-240V			
	Not Dimmable	Wall mount	Driver lifetime 50,000 hrs			
	Unswitched	2-step Macadam ellipse	Efficacy 59 lm/W			
	IP65	Tilt adjustable angle 90°				
	INCLINE TWIN P.107					
	Exterior	No driver required	LED lifetime 42,300 hrs	● CB	1419004	
	Integral 14.2W LED	Brass	Supply frequency 50/60 Hz			
	1075LM 3000K 80CRI	1.8kg	Supply voltage 220-240V			
	Dimmable - phase trailing edge	Wall mount	Driver lifetime 50,000 hrs			
	Unswitched	2-step Macadam ellipse	Efficacy 76 lm/W			
	IP65	Tilt adjustable angle 90°				
	JURA SINGLE SPOT P.107					
	Exterior	IP65	Wall mount downlight/uplight	● CB	1375008	
	6W Max LED GU10 excl.	CE Class I	Tilt adjustable angle 100°			
	Max lamp length 59mm	No driver required	Rotation adjustable angle 260°			
	Dimmable	Brass	Trailing wire length 170mm			ⓘ ⚠
	JURA SPIKE SPOT P.107					
	Exterior	IP65	Ground/Floor installation	● CB	1375007	
	6W Max LED GU10 excl.	CE Class I	Tilt adjustable angle 100°			
	Max lamp length 59mm	No driver required	Rotation adjustable angle 260°			
	Dimmable	Brass	Trailing wire length 205mm			ⓘ ⚠
						
	Unswitched	1.8kg				ⓘ ⚠




	KAPPA P.23					
	Bathroom	CE Class II	LED lifetime 60,000 hrs	● MB	1151004	
	Integral 3.4W LED	No driver required	Supply frequency 50/60 Hz			
	98LM 3000K 90CRI	Zinc	Supply voltage 100-277V			
	Not dimmable	0.73kg	Driver lifetime 30,000 hrs			
	KURO 250 P.97					
	Exterior	IP44	Ground/Floor installation	● TB	1430001	
	Integral 1.3W LED	CE Class III	5-step Macadam ellipse			
	145LM 2700K 80CRI	No driver required	LED lifetime 54,000 hrs			
	Dimmable: integral touch dimmer	Aluminium	Supply voltage 5V DC			ⓘ
	KURO 450 P.97					
	Exterior	IP44	Ground/Floor installation	● TB	1430002	
	Integral 1.3W LED	CE Class III	5-step Macadam ellipse			
	145LM 2700K 80CRI	No driver required	LED lifetime 54,000 hrs			
	Dimmable: integral touch dimmer	Aluminium	Supply voltage 5V DC			ⓘ
	KYOTO LED P.25					
	Bathroom	Unswitched	Zinc	● MB	1060013	
	Integral 7.9W LED	IP44	1kg	● PCh	1060006	
	318LM 2700K 80CRI	CE Class II	Vertical wall mount			
	Not dimmable	No driver required				⚠
	LAGO 280 P.33					
	Bathroom	Unswitched	Aluminium	● PCh	1297001	
	12W Max LED E27/ES excl.	IP44	1.2kg	● MN	1297002	
	Max lamp length 155mm	CE Class II	Vertical wall mount	● Br	1297007	
	Dimmable	No driver required	Shade sold separatley			
H: 195 Ø: 113		CONE 195	NB 5018046	WF 5018001	WG 5019001	
	LUCCA RECESSED P.53					
	Interior	No driver required	Supply frequency 50/60Hz	● MB	1435009	
	Integral 3.6W LED	Zinc	Supply voltage 100-277V	● MN	1435010	
	124LM 2700K 90CRI	0.93kg	Driver lifetime 30000 hrs	● MG	1435011	
	Not Dimmable	Wall mount	Efficacy 34 lm/W	● Br	1435012	
	Switched	3-step Macadam ellipse	Oval cut out: 44mm x 24mm			
	IP20	Main light beam angle 31.8°	Recess depth: 65mm			
	CE Class I	LED lifetime 60000 hrs	Plaster board installation only			ⓘ
	LUCCA RECESSED UNSWITCHED		MB 1435013	MN 1435014	MG 1435015	BR 1435016
	*special order only					ⓘ ⚠
	LUCCA SURFACE P.53					
	Interior	CE Class I	Main light beam angle 31.8°	● MB	1435001	
	Integral 3.6W LED	No driver required	LED lifetime 60000 hrs	● MN	1435002	
	124LM 2700K 90CRI	Zinc	Supply frequency 50/60Hz	● MG	1435003	
	Not Dimmable	0.95kg	Supply voltage 100-277V	● Br	1435004	
	Switched	Wall mount	Driver lifetime 30000 hrs			
	IP20	3-step Macadam ellipse	Efficacy 34 lm/W			ⓘ
	LUCCA SURFACE UNSWITCHED		MB 1435005	MN 1435006	MG 1435007	BR 1435008
	*special order only					ⓘ ⚠



	MASCALI ROUND LED P.29					
	Bathroom	No driver required	LED lifetime 53,000 hrs	● MB	1373011	
	Integral 7.4W LED	Mild steel	Supply frequency 50/60 Hz			
	110LM 2700K 90CRI	1.78kg	Supply voltage 100-240V			
	Not dimmable	Horizontal wall mount	Driver lifetime 35,000 hrs			
	Switched	Tilt adjustable angle 65°	Mains 230V			
	IP44	Rotation adjustable angle 180°	Efficacy 15 lm/W			
	CE Class II	2610-2710K Macadam ellipse				🔥🔊🔥
	MESSINA 200 P.89					
	Exterior	Unswitched	Stainless steel	● TB	1183028	
	12W Max LED E27/ES excl.	IP44	4.1kg			
	Max lamp length 240mm	CE Class I	Vertical wall mount			🔊🔥
	Dimmable	No driver required				
	MESSINA TWIN P.89					
	Exterior	Unswitched	Stainless steel	● TB	1183027	
	2 X 12W Max LED E27/ES excl.	IP44	5.3kg			
	Max lamp length 240mm	CE Class I	Vertical wall mount			🔊🔥
	Dimmable	No driver required				
	MILO 300 P.63					
	Interior	Unswitched	Ceramic	○ GW	1299009	
	12W Max LED E27/ES excl.	IP20	1.16kg			
	Max lamp length 120mm	CE Class II	Horizontal wall mount			🔥
	Dimmable	No driver required				
	MINIMA SLIMLINE 25 FIRE RATED P.63					
	Bathroom	No driver required	Ceiling installation	● MB	1249037	
	6W Max LED GU10 excl.	IP65	Round cut out: Ø86mm	○ MW	1249036	
	Max lamp length 73mm	CE Class II	Recess depth: 150mm			
	Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2			🔥🔊🔥
	Unswitched	0.35kg				
	MINIMA SLIMLINE ROUND ADJUSTABLE FIRE RATED P.79					
	Indoor	IP20	Rotation adjustable angle 360°	● MB	1249041	
	6W Max LED GU10 excl.	CE Class II	Round cut out: Ø86mm	○ MW	1249040	
	Max lamp length 73mm	Mild steel	Recess depth: 150mm			
	Dimmable	0.37kg	Fire rated: 30 min, 60 min & 90 min EN1365-2			
	Unswitched	Ceiling installation				🔥🔊🔥
	No driver required	Tilt adjustable angle 30°				
	MINIMA SLIMLINE ROUND FIXED FIRE RATED IP65 P.79					
	Bathroom	No driver required	Ceiling installation	● MB	1249035	
	6W Max LED GU10 excl.	IP65	Round cut out: Ø86mm	○ MW	1249034	
	Max lamp length 73mm	CE Class II	Recess depth: 150mm			
	Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2			🔥🔊🔥
	Unswitched	0.36kg				
	MINIMA SLIMLINE SQUARE ADJUSTABLE FIRE RATED P.79					
	Indoor	IP20	Rotation adjustable angle 360°	● MB	1249043	
	6W Max LED GU10 excl.	CE Class II	Square cut out: 86mm x 86mm	○ MW	1249042	
	Max lamp length 73mm	Mild steel	Recess depth: 150mm			
	Dimmable	0.39kg	Fire rated: 30 min, 60 min & 90 min EN1365-2			
	Unswitched	Ceiling installation				🔥🔊🔥
	No driver required	Tilt adjustable angle 30°				

	MINIMA SLIMLINE SQUARE FIXED FIRE RATED IP65 P.79					
Bathroom	No driver required	Ceiling installation	● MB	1249039		
6W Max LED GU10 excl.	IP65	Square cut out: 86mm x 86mm	○ MW	1249038		
Max lamp length 73mm	CE Class II	Recess depth: 150mm				
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2				
Unswitched	0.38kg					
	MITSU FLOOR P.65					
Interior	IP20	Tilt adjustable angle 90°	● MN	1394011		
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● Br	1394012		
Max lamp length 126mm	No driver required	Ground/floor mount				
Not dimmable	Mild steel	Trailing wire 3,000mm				
Switched	8kg					
	MITSU TABLE P.65					
Interior	IP20	Tilt adjustable angle 90°	● MN	1394009		
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● Br	1394010		
Max lamp length 126mm	No driver required	Ground/floor mount				
Not dimmable	Mild steel	Trailing wire 2000mm				
Switched	4.7kg					
	MITSU SWING ARM P.45					
Interior	IP20	Tilt adjustable angle 90°	● MN	1394001		
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● Br	1394002		
Max lamp length 126mm	No driver required	Horizontal wall mount				
Not dimmable	Mild steel					
Switched	1.5kg					
	MITSU WALL P.45					
Interior	IP20	Tilt adjustable angle 90°	● MN	1394003		
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● Br	1394004		
Max lamp length 126mm	No driver required	Vertical wall mount				
Dimmable	Mild steel					
Switched	0.7kg					
H: 165 Ø: 173		CONE 173 SHADE / Polycotton	BF 5018032	MF 5018045	OF 5018033/silk	PF 5018034
			WF 5018031			
	MIURA DESK USB P.67					
Interior	Mild steel		● MN	1444007		
Integral 7.5W LED	3.47kg	Supply voltage 220-240V	● MG	1444008		
367LM 2700K 80CRI	3-step Macadam ellipse	Driver lifetime 30000 hrs				
Not Dimmable	Tilt adjustable angle 90°	Efficacy 49 lm/W				
Switched	Rotation adjustable angle 330°	Wire length 2000mm				
IP20	Beam angle 74.4°	Shade sold separately				
CE Class II	LED lifetime 42300 hrs	USB 2.1A 5V				
No driver required	Supply frequency 50/60Hz					
	MIURA SWING ARM P.41					
Interior	Zinc	Supply frequency 50/60Hz	● MB	1444004		
Integral 7.5W LED	0.99kg	Supply voltage 220-240V	● MN	1444005		
367LM 2700K 80CRI	Vertical wall mount	Driver lifetime 30000 hrs	● MG	1444006		
Not Dimmable	3-step Macadam ellipse	Efficacy 49 lm/W				
Switched	Tilt adjustable angle 90°	Shade sold separately				
IP20	Rotation adjustable angle 330°					
CE Class I	Beam angle 71.4°					
No driver required	LED lifetime 42300 hrs					




	MIURA WALL P.41				
	Interior	No driver required	Lifetime 42300 hrs	● MB	1444001
	Integral 7.5W LED	Zinc	Supply frequency 50/60Hz	● MN	1444002
	367LM 2700K 80CRI	0.74kg	Supply voltage 220-240V	● MG	1444003
	Not Dimmable	Vertical wall mount	Driver lifetime 30000 hrs		
	Switched	3-step Macadam ellipse	Efficacy 49 lm/W		
	IP20	Tilt adjustable angle 90°	Shade sold separately		
	CE Class I	Rotation adjustable angle 330°			




H: 93 Ø: 105	CONE 105 SHADE / Mild Steel	MB 5018052	MN 5018053	MG 5018054
--------------	------------------------------------	-------------------	-------------------	-------------------




	MYOS P.103				
	Exterior	CE Class III	Tilt adjustable angle 180°	● TB	1426002
	Integral 8W LED	Driver: constant current 700mA excl.	Main light beam angle 26.1°		
	312LM 3000K 90CRI	Aluminium	LED lifetime 60500 hrs	Extension pole	
	Dimmable: driver dependent	1.0kg	Efficacy 27 lm/W	● TB	6034001
	Unswitched	Ground/ Floor installation	Wire length 2700mm		
	IP65	3-step Macadam ellipse			 

	PARALLEL P.61				
	Interior	Unswitched	Ceramic	○ C	1438001
	12W Max LED E27/ES excl.	IP20	0.8kg		
	Max lamp length 120mm	CE Class II	Horizontal wall mount		
	Dimmable	No driver required			




	PINHOLE SLIMLINE ROUND ADJUSTABLE FIRE RATED P.75				
	Indoor	IP20	Rotation adjustable angle 360°	○ MW	1434003
	6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm		
	Max lamp length 73mm	Mild steel	Recess depth: 150mm		
	Dimmable	0.4kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	Ceiling installation			
	No driver required	Tilt adjustable angle 25°			 




	PINHOLE SLIMLINE ROUND FIXED FIRE RATED IP65 P.75				
	Bathroom	No driver required	Ceiling installation	○ MW	1434001
	6W Max LED GU10 excl.	IP65	Round cut out: Ø70mm		
	Max lamp length 73mm	CE Class II	Recess depth: 150mm		
	Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	0.39kg			 




	PINHOLE SLIMLINE ROUND FLUSH ADJUSTABLE FIRE RATED P.75				
	Indoor	IP20	Rotation adjustable angle 360°	○ MW	4134008
	6W Max LED GU10 excl.	CE Class II	Round cut out: Ø79mm		
	Max lamp length 73mm	Mild steel	Recess depth: 150mm		
	Dimmable	0.4kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	Ceiling installation - existing ceiling			
	No driver required	Tilt adjustable angle 25°			 




	PINHOLE SLIMLINE ROUND FLUSH FIXED FIRE RATED IP65 P.75				
	Bathroom	No driver required	Ceiling installation - new ceiling	○ MW	1434007
	6W Max LED GU10 excl.	IP65	Round cut out: Ø62mm		
	Max lamp length 73mm	CE Class II	Recess depth: 150mm		
	Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	0.39kg			 



	PINHOLE SLIMLINE SQUARE ADJUSTABLE FIRE RATED P.75				
	Indoor	IP20	Rotation adjustable angle 360°	○ MW	1434004
	6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm		
	Max lamp length 73mm	Mild steel	Recess depth: 150mm		
	Dimmable	0.42kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	Ceiling installation			
	No driver required	Tilt adjustable angle 25°			 

	PINHOLE SLIMLINE SQUARE FIXED FIRE RATED IP65 P.75				
	Bathroom	No driver required	Ceiling installation	○ MW	1434002
	6W Max LED GU10 excl.	IP65	Round cut out: Ø70mm		
	Max lamp length 73mm	CE Class II	Recess depth: 150mm		
	Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	0.39kg			 



	PINHOLE SQUARE TRIPLE ADJUSTABLE P.75				
	Indoor	IP20	Rotation adjustable angle 360°	○ MW	1434006
	3 X 6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm x 3		
	Max lamp length 73mm	Mild steel	Recess depth: 150mm		
	Dimmable	1.04kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	Ceiling installation			
	No driver required	Tilt adjustable angle 25°			 

	PINHOLE SQUARE TWIN ADJUSTABLE P.75				
	Indoor	IP20	Rotation adjustable angle 360°	○ MW	1434005
	2 X 6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm x 2		
	Max lamp length 73mm	Mild steel	Recess depth: 150mm		
	Dimmable	0.75kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	Ceiling installation			
	No driver required				 




	SAGARA P.27				
	Bathroom	Unswitched	Zinc	● MB	1168003
	3W Max LED G9 excl.	IP44	0.9kg		
	Max lamp length 55mm	CE Class II	Vertical wall mount		
	Dimmable	No driver required			 




	SIDE BY SIDE GRANDE USB P.43				
	Interior	Switched	Horizontal/vertical wall mount	● Br	1406012
	12W Max LED E27/ES excl.	IP20	Tilt adjustable angle 90°	● MB	1406013
	+ integral 3.6W LED	CE Class I	Rotation adjustable angle 330°	● MN	1406014
	134LM 2700K 90CRI	No driver required	Secondary lamp beam angle 17°		
	Max lamp length 118mm	Zinc	Shade sold separately		
	Not dimmable	1.87kg			






H: 160 Ø: 250	TAPERED ROUND 250 SHADE / Polycotton	BF 5035004	MF 5035023	PF 5035005	WF 5035003
---------------	---------------------------------------------	-------------------	-------------------	-------------------	-------------------






	TACOMA SINGLE P.17				
	Bathroom	Unswitched	Zinc	● PCh	1429001
	3W Max LED G9 excl.	IP44	0.95kg	● MB	1429004
	Max lamp length 60mm	CE Class I	Vertical wall mount	● AB	1429007
	Dimmable	No driver required			






	TACOMA SINGLE GRANDE P.17				
	Bathroom	Unswitched	Zinc	PCh 1429003	
	3W Max LED G9 excl.	IP44	0.96kg	MB 1429006	
	Max lamp length 60mm	CE Class I	Vertical wall mount	AB 1429009	
	Dimmable	No driver required			
	TACOMA TWIN P.17				
	Bathroom	Unswitched	Mild steel	PCh 1429002	
	2 X 3W Max LED G9 excl.	IP44	0.94kg	MB 1429005	
	Max lamp length 60mm	CE Class I	Vertical wall mount	AB 1429008	
	Dimmable	No driver required			
H: 130 Ø: 135					
TACOMA SHADES /Glass Plain/opal 5036001 Ribbed/clear 5036003 Ribbed/opal 5036004 Ribbed/smoked 5036005					
	TRIMLESS ROUND ADJUSTABLE P.77				
	Indoor	No driver required	Ceiling installation - new ceiling	MW 1248024	
	6W Max LED GU10 excl.	IP20	Tilt adjustable angle 30°		
	Max lamp length 73mm	CE Class II	Rotation adjustable angle 360°		
	Dimmable	Mild steel	Round cut out: Ø79mm		
Unswitched	0.39kg	Recess depth: 150mm			
	TRIMLESS ROUND FIXED P.77				
	Bathroom	No driver required	Ceiling installation - new ceiling	MW 1248023	
	6W Max LED GU10 excl.	IP20	Square cut out: Ø79mm		
	Max lamp length 73mm	CE Class II	Recess depth: 150mm		
	Dimmable	Mild steel			
Unswitched	0.39kg				
	TRIMLESS ROUND TWIN ADJUSTABLE P.77				
	Indoor	IP20	Rotation adjustable angle 360°	MW 1248021	
	2 X 6W Max LED GU10 excl.	CE Class II	Slot cut out: W159 x Ø79mm		
	Max lamp length 73mm	Mild steel	Recess depth: 150mm		
	Dimmable	0.71kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	Ceiling installation - new ceiling			
No driver required	Tilt adjustable angle 30°				
	TRIMLESS SLIMLINE ROUND ADJUSTABLE FIRE RATED P.77				
	Indoor	IP20	Rotation adjustable angle 360°	MW 1248019	
	6W Max LED GU10 excl.	CE Class II	Round cut out: Ø79mm		
	Max lamp length 73mm	Mild steel	Recess depth: 150mm		
	Dimmable	0.39kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	Ceiling installation - new ceiling			
No driver required	Tilt adjustable angle 30°				
	TRIMLESS SLIMLINE ROUND FIXED FIRE RATED IP65 P.77				
	Bathroom	No driver required	Ceiling installation - new ceiling	MW 1248017	
	6W Max LED GU10 excl.	IP65	Round cut out: Ø79mm		
	Max lamp length 73mm	CE Class II	Recess depth: 150mm		
	Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
	Unswitched	0.39kg			
	TRIMLESS SQUARE ADJUSTABLE P.77				
	Indoor	No driver required	Ceiling installation - new ceiling	MW 1248020	
	6W Max LED GU10 excl.	IP20	Tilt adjustable angle 30°		
	Max lamp length 73mm	CE Class II	Rotation adjustable angle 360°		
	Dimmable	Mild steel	Square cut out: 79mm x 79mm		
	Unswitched	0.41kg	Recess depth: 150mm		

	TRIMLESS SQUARE FIXED P.77	Bathroom	No driver required	Ceiling installation - new ceiling	 MW 1248018	
		6W Max LED GU10 excl.	IP20	Square cut out: 79mm x 79mm		
		Max lamp length 73mm	CE Class II	Recess depth: 150mm		
		Dimmable	Mild steel			
		Unswitched	0.43kg			

	TRIMLESS SQUARE TWIN ADJUSTABLE P.77	Indoor	No driver required	Ceiling installation - new ceiling	 MW 1248022	
		2 X 6W Max LED GU10 excl.	IP20	Tilt adjustable angle 30°		
		Max lamp length 73mm	CE Class II	Rotation adjustable angle 360°		
		Dimmable	Mild steel	Square cut out: 162mm x 79mm		
		Unswitched	0.71kg	Recess depth: 150mm		

	VERSAILLES 250 PHASE DIMMABLE P.77	Interior	CE Class II	LED lifetime 54000 hrs	 PCh 1380024	
		Integral 4.5W LED	No driver required	Supply frequency 50/60Hz	 Br 1380025	
		320LM 3000K 80CRI	Mild Steel	Supply voltage 220-240V	 MG 1380026	
		Dimmable: phase leading+trailing	2.48kg	Driver lifetime 50000 hrs		
		Unswitched	Vertical wall mount	Efficacy 71 lm/W		
		IP44 Zone 2, 3	3-step Macadam ellipse			

	VERSAILLES 400 PHASE DIMMABLE P.77	Interior	CE Class II	LED lifetime 54000 hrs	 PCh 1380029	
		Integral 7.1W LED	No driver required	Supply frequency 50/60Hz	 Br 1380030	
		658LM 3000K 80CRI	Mild Steel	Supply voltage 220-240V	 MG 1380031	
		Dimmable: phase trailing edge	3.2kg	Driver lifetime 50000 hrs		
		Unswitched	Vertical wall mount	Efficacy 93 lm/W		
		IP44 Zone 2, 3	3-step Macadam ellipse			

	ZEPP0 READER P.49	Interior	CE Class I	Secondary lamp beam angle 17°	 MW 1176008	
		3W Max LED G9 excl. + integral 4.1W LED	No driver required	LED lifetime 60000 hrs	 MB 1176009	
		149LM 2700K 90CRI	Aluminium	Supply frequency 50/60Hz	 MN 1176010	
		Max lamp length 55mm	1.92kg	Supply voltage 100-277V		
		Not Dimmable	Horizontal/vertical wall mount	Driver lifetime 30000 hrs		
		Switched	Rotation adjustable angle 330°	Efficacy 36 lm/W		
		IP20	3-step Macadam ellipse			

SHADES

STANDARD COLOURS We supply a range of standard shade options to complement our designs. You'll find full details of compatible shades on each of the product pages.

					
WF* White fabric Tissu blanc Weißer Stoff Tessuto bianco	WP* White Pleated Blanc plissé weiß plissiert Bianco pieghettato	BF* Black fabric Tissu noir Schwarzer Stoff Tessuto nero	OF* Oyster fabric Tissu oyster Oyster Stoff Tessuto madreperla	PF* Putty fabric Tissu putty Putty Stoff Tessuto grigio stucco	MF* Mocha fabric Tissu moka Mokka Stoff Tessuto moca

SPECIAL ORDERS All Astro shades are available in a variety of additional colours and can be ordered on a special basis with a minimum order quantity of 30 pieces.



SPECIAL ORDERS

In addition to our extensive product portfolio which can be found at astrolighting.com, we also provide exclusive specification options. Special order luminaries, which offer you flexibility in finish, size or specification, have a minimum order quantity of 100 pieces and an extended lead time, although we will always work hard to meet your project deadline.



IT Finiture paralume standard: Forniamo una serie di paralumi standard adatti per tutti i progetti. Troverete dettagli sui paralumi compatibili su ognuna delle pagine prodotto. Opzioni colori speciali: Tutti i paralumi Astro sono disponibili in una serie di colori aggiuntivi e possono essere richiesti tramite ordine speciale in numero minimo di 30 pezzi.

FR Finitions des abat-jours standard: Nous proposons une gamme d'abat-jours standard qui complètent nos modèles. Vous trouverez toutes les informations sur les abat-jours compatibles dans les pages consacrées à chacun de nos produits. Choix de couleurs spéciales: Tous les abat-jours Astro sont disponibles dans une variété de couleurs supplémentaires. Ils peuvent être commandés spécialement en quantité minimale de 30 unités.

DE Standardausführungen: Wir liefern ein breites Spektrum von Standardschirmen zur Ergänzung unserer Designs. Vollständige Einzelheiten zu kompatiblen Schirmen finden sie auf den jeweiligen Produktseiten. Besondere Farboptionen: Alle Astro-Lampenschirme sind in einer Vielzahl zusätzlicher Farben erhältlich und können auf besonderer Basis mit einer Mindestabnahmemenge von 30 Stück bestellt werden.

* Please note colours may vary from batch to batch / Merci de noter que les couleurs peuvent varier d'un lot a l'autre / Bitte beachten: Farben können je nach Charge variieren / I colori potrebbero essere diversi a seconda del lotto di produzione.

IT Oltre alla nostra vasta gamma di prodotti, reperibile su astrolighting.com, forniamo anche componenti opzionali in base a specifiche di progetto esclusive. Apparecchi di illuminazione richiesti con ordine speciale che offrono flessibilità di finitura, dimensioni o specifiche, prevedono una quantità di ordinazione minima di 100 pezzi e una data di consegna estesa, anche se faremo sempre il massimo per rispettare la data di consegna stabilita per il progetto.

FR En plus de notre vaste gamme de produits, que vous pouvez découvrir sur astrolighting.com, nous proposons des options exclusives. Elles incluent des luminaires disponibles sur commande spéciale, autorisant plus de flexibilité dans le choix des finitions, des tailles ou des spécifications, une quantité minimale de 100 unités et un délai de livraison plus souple, mais nous faisons toujours le maximum pour respecter les délais de votre projet.

DE Zusätzlich zu unserem umfassenden Produktportfolio, das Sie auf astrolighting.com finden, bieten wir außerdem exklusive Spezifikationsoptionen an. Sonderbestellungen von Leuchten mit flexibel auswählbaren Ausführungen, Größen oder Spezifikationen sind ab einer Mindestbestellmenge von 100 Stück möglich und erfordern längere Lieferzeiten, wobei wir jedoch stets größte Anstrengungen unternehmen werden, Ihre Projektfristen einzuhalten.

IT Gli apparecchi di illuminazione Astro sono compatibili con la maggior parte dei sistemi di illuminazione Smart Home come Philips Hue. Per una soluzione di controllo professionale, collaboriamo con Casambi per offrire un sistema di illuminazione intelligente wireless multifunzione facile da integrare e configurare. Attraverso i suoi interruttori e sensori wireless, Casambi fornisce un sistema di controllo dell'illuminazione veramente intelligente. Vedi astrolighting.com/Casambi per maggiori informazioni.

FR Les luminaires Astro à ampoules sont compatibles avec la plupart des systèmes d'éclairage Smart Home, tels que Philips Hue. Pour notre solution de contrôle professionnelle, nous nous sommes associés à Casambi qui nous permet d'intégrer un système d'éclairage intelligent sans fil complet, facile à intégrer et à configurer. Grâce à des interrupteurs et des capteurs sans fil, Casambi fournit un contrôle de l'éclairage véritablement intelligent. Consultez astrolighting.com/Casambi pour en savoir plus.

DE Astro-Leuchten sind mit den meisten intelligenten Beleuchtungssystemen wie etwa Philips Hue kompatibel. Für eine professionelle Steuerungslösung arbeiten wir mit unserem Partner Casambi zusammen, um ein funktionsreiches, drahtloses intelligentes Beleuchtungssystem anzubieten, das problemlos integrier- und konfigurierbar ist. Durch zusätzliche Funkschalter und -sensoren ermöglicht Casambi eine wahrhaft intelligente Beleuchtungssteuerung. Mehr hierzu erfahren Sie auf astrolighting.com/Casambi.






Astro lamped luminaires are compatible with most Smart Home lighting systems such as Philips Hue. For a professional control solution, we have partnered with Casambi to offer a fully featured wireless smart lighting system that is easy to integrate and configure. With the addition of wireless switches and sensors, Casambi provides truly intelligent lighting control. See astrolighting.com/Casambi to learn more.



FINISHES

AB antique brass l'ation antique messing antik ottone antico	Br bronze bronze brunze bronz	BSS brushed stainless steel acier inoxydable brossé rostfreier edelstahl gebürst, acciaio inox spazzolato	C ceramic céramique keramisch ceramica	CB coastal brass l'ation coastal messing coastal ottone coastal	FR frosted glass verre satiné satinierter glas smerigliato	GW glass white blanc brillant glanz weiß bianco lucido	MB matt black noir mat matt schwarz nero opaco
MG matt gold or mat matt gold oro opaco	MN matt nickel nickel mat nickel matt nickel opaco	MW matt white blanc mat matt weiß bianco opaco	NB natural brass laiton naturel messing natur ottone naturale	PCb polished chrome chrome poli chrom poliert cromo brillante	P plaster plâtre gips gesso	TB textured black noir texturé texture schwarz nero tessurizzato	TW textured black blanc texturé texture weiß bianco tessurizzato

SYMBOLS

	GLASS COMPONENT verre / glas / componente in vetro		SWITCHED with on/off switch or pull cord avec interrupteur / mit An- / Ausschalter oder Zugschalter / con interruttore on/off o a tirante
	DIMMABLE dimmable / dimmbar / dimmerabile		PHOTOMETRIC DATA Please refer to the Astro website: astrolighting.com for photometric data on this product. Merci de consulter le site internet d'Astro pour les données photométriques de cet article. astrolighting.com/ / Die lichttechnischen Daten für dieses Produkt finden Sie auf unserer Webseite astrolighting.com/ / I dati fotometrici di questo prodoto si possono trovare sul sito web: astrolighting.com
	MAGNIFICATION grossissement / vergrößerung / ingrandimento		CASAMBI Products are compatible when combined with Casambi Accessories (see website for details) . I prodotti sono compatibili se combinati con gli accessori Casambi (visita il sito web per dettagli) / Les produits sont compatibles lorsqu'ils sont combinés avec les accessoires Casambi (voir le site Web pour plus de détails) / Produkte sind in Kombination mit Casambi-Zubehör kompatibel (Einzelheiten finden Sie auf der Website)
	FIRE-RATED Résistant au feu / schwer entflammbar / ignifugo		

ASTRO GLOBAL LOCATIONS + DISTRIBUTORS

UNITED KINGDOM

The Astro Building
Unit 2, River Way
Harlow CM20 2GJ

hello-uk@astrolighting.com
astrolighting.com

ITALY

hello-it@astrolighting.com
astrolighting.com

NORTH AMERICA

hello-us@astrolighting.com
us.astrolighting.com

SINGAPORE

hello-sg@astrolighting.com
astrolighting.com

CHINA

hello-ch@astrolighting.com
astrolighting.com


MIDDLE EAST & AFRICA

hello-mea@astrolighting.com
astrolighting.com

GENERAL ENQUIRIES

customerservice@astrolighting.com
astrolighting.com

To find all our global distributors
please visit our website /
Um unsere internationalen
Fachhändler zu finden, besuchen
Sie bitte unsere Website / Pour
trouver tous nos revendeurs
internationaux, veuillez consulter
notre site web / Per localizzare
tutti i nostri partner internazionali
visita il nostro sito web:
astrolighting.com/distributors

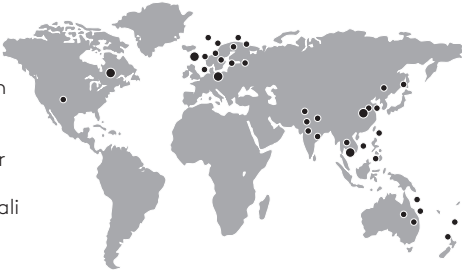

AUSTRALIA

ENLIGHTENED LIVING (SHOWROOM)
sydney@enlightened-living.com.au
www.enlightened-living.com.au

AUSTRIA

ILLUMINA LEUCHTEN GMBH
info@illumina.de
www.illumina.de

BELGIUM

BRULIGHT
info@brulight.eu
www.brulight.eu

CHINA

ART LIGHTING
art_light@126.com

CZECH REPUBLIC

LONDON LIGHT S.R.O
info@londonlight.cz
www.londonlight.cz

DENMARK

ALL-LIGHT A/S
info@all-light.dk
www.all-light.dk

ESTONIA

AS MOODNE VALGUSTUS
moodne@valgustus.ee
www.valgustus.ee

FINLAND

TECLUX OY
teclux@teclux.fi
www.teclux.fi

FRANCE

RÊ MAJEUR SAS
contact@re-majeur.com
www.re-majeur.com

GERMANY

ILLUMINA LEUCHTEN GMBH
info@illumina.de
www.illumina.de

HONG KONG

FUTURE LIGHTING (SHOWROOM)
sales@fclcl.com.hk
www.futurelighting.com.hk

INDIA

ARCHITECTURAL LIGHTING
CONCEPTS
info@alclighting.com
www.alclighting.com

DEBBAS LIGHTING INDIA PVT LTD
info@debbasprime.in
www.debbas.com

DEFA LIGHTING SOLUTIONS
PVT LTD
www.defasolutions.net
www.thedefa.com

THEA LIGHTWORKS
info@th-ea.com
www.loveofflight.in

GOJIS
web@gojis.in
www.gojis.in

INDONESIA

CLA ASIA PT CREATIVE LIGHTING ASIA
indonesia@cla.asia
www.cla.asia

LAFLO
ask@laflo.co.id
www.laflo.co.id

JAPAN

OLYMPIA
sale@olympia-jp.co.jp
www.olympia-jp.co.jp

LUXEMBOURG

BRULIGHT
info@brulight.eu
www.brulight.eu

MALAYSIA

ARI LIGHTING
info@arilighting.my
www.arilighting.my

ILUMEN

info@ilumen.my
www.ilumen.my

MAURITIUS

CLARDY LTD
admin@clardy.mu
www.clardy.mu

MEXICO

DIEZ COMPANY
ask@diezcompany.mx
www.diezcompany.mx

MOROCCO

CNI MOROCCO
welcome@lights.cni-sa.com
www.lights.cni-sa.co

NETHERLANDS

ILU DESIGN B.V.
info@iludesign.com
www.iludesign.com

NORWAY

TRIOLUX AS
post@triolux.no
www.triolux.no

NEW ZEALAND

ECC NZ (SHOWROOM)
info@ecc.co.nz
www.ecc.co.nz

PHILLIPINES

GREEN GROUP (SHOWROOM)
info@greengroupinc-asia.com
www.greengroupinc-asia.com

STELTZ INTERNATIONAL INC.
www.steltzinternational.com

POLAND

AURORA TECHNIKA ŚWIETLNA
aurorats@aurorats.pl
www.aurorats.pl

PORTUGAL

ASTRATEC
mail@astratec.pt
www.astratec.pt

QATAR

ABENSAL
qatar@abensal.com
www.abensal.com

RUSSIA

GBM
info@gbm-light.ru
www.gbm-light.ru

SINGAPORE

GENESIS LIGHTING (SHOWROOM)
enquiry@genesislightingco.com
www.genesislightingco.com

KOIZUMI
sales@koizumi.sg
www.koizumi.sg

LIGHTIMAGE
info@lightimage.sn
www.lightimage.sn

LIM KIM HAI
customerservice@limkimhai.com.sg
www.limkimhai.com.sg

LUXLIGHT
info@luxlight.sg
www.luxlight.sg

MADE & MAKE (SHOWROOM)
info@madeandmake.sg
www.madeandmake.sg

MILLION LIGHTING
enquiry@millionlighting.com
www.millionlighting.com

PALICON LIGHTING
sales@palicon.asia
www.palicon.asia

SLOVAKIA

LONDON LIGHT S.R.O
info@londonlight.cz
www.londonlight.cz

SOUTH KOREA

SAMJIN
theedit@theedit.co.kr
www.theedit.co.kr

D LIGHT
info@dlight.sk
www.ilumen.sk

OPUS INTL
info@opus-intl.com
www.opus-intl.com

SPAIN

FORUM INTERNACIONAL
info@foruminternacional.es
www.foruminternacional.es

SRI LANKA

MY LAN MARKETING
info@mylanmarketing.sk
www.mylanmarketing.sk

PHOTONICS LIGHTING PVT. LTD.
Sales@photonics.lk
www.www.photonics.lk

SWEDEN

SANOVA AB
info@sanova.se
www.sanova.se

SWITZERLAND

3L SUISSE SA
info@3-l.ch
www.3-l.ch

TAIWAN

CITYLITE
citylite@ms10.hinet.net
www.citylite.com.tw

THAILAND

LIGHTING HOUSE
lightonthelion@gmail.com
www.lightinghouse.co.th

PALICON
info@palicon.co.th
www.palicon.asia

UKRAINE

P.E. ELEKOMP
elekomp@ukr.net
www.elekomp.com.ua

UNITED ARAB EMIRATES

ABENSAL LIGHTING
info@abensal.com
www.abensal.com

VIETNAM

LONG KHANG
info@lk-tech.com
www.lk-tech.com

NEWLIGHT (SHOWROOM)
info@newlightvn.com
www.newlightvn.com

DESIGN RIGHTS

The majority of products shown in this catalogue have been designed by Astro Lighting Limited, which retains the ownership of all design rights in these Astro-designed products. Astro Lighting has a policy of constant product improvement, and whilst every care has been taken in the production of this catalogue, products supplied may differ in detail from the illustrations, images and descriptions given and therefore these descriptions and illustrations shall not form part of any contract. Details of alterations will be provided on request. Astro Lighting only use LEDs from the leading manufacturers. Nevertheless, colour temperatures can vary between batches and between manufacturers.

IT La maggior parte dei prodotti illustrati nel presente catalogo è stata ideata da Astro Lighting Limited, che detiene tutti i diritti di progettazione di tali prodotti Astro. Astro Lighting ha adottato da sempre una politica di costante sviluppo del prodotto ed ha elaborato questo catalogo con estrema cura ed attenzione. Prodotti forniti possono essere diversi nei dettagli dalle illustrazioni, le immagini e le descrizioni riportate e quindi queste descrizioni e le illustrazioni non fanno parte di alcun contratto. I dettagli delle modifiche verranno forniti su richiesta. Astro Lighting utilizza solamente LED di primaria qualità. La temperatura di colore del LED potrebbe essere diversa a seconda dei lotti e dei produttori.

FR La majorité des produits présents dans ce catalogue ont été créés par Astro Lighting Ltd qui en détient tous les droits. Astro Lighting mène une politique d'amélioration constante de ses produits. De ce fait et, bien que le plus grand soin ait été apporté à la réalisation de ce catalogue, les produits fournis peuvent différer dans le détail des illustrations, des images et des descriptions fournies et, par conséquent ces descriptions et illustrations ne font pas partie de tout contrat. La description des éventuelles modifications peut être obtenue sur simple demande. Astro Lighting utilise exclusivement des LEDs de fabricants reconnus. Néanmoins les températures de couleur peuvent varier d'un fabricant à l'autre et d'un lot à l'autre.

DE Die Mehrheit der im Katalog gezeigten Produkten wurden von Astro Lighting Limited entworfen. Astro Lighting Limited behält sich alle Entwurfsrechte Ihrer entworfenen Produkten vor. Astro Lighting Limited betreibt eine Politik der konstanten Produktverbesserung. Trotz größter Sorgfalt bei der Erstellung dieses Kataloges könnten. Die gelieferten Produkte können im Detail von den Abbildungen, Bildern und Beschreibungen gegeben und damit diesen Beschreibungen und Darstellungen abweichen sind nicht Teil eines Vertrages. Details von etwaigen Änderungen werden gern auf Anfrage bereitgestellt. Astro Lighting verwendet ausschließlich LEDs führender Hersteller. Dennoch kann die Farbtemperatur je nach Hersteller und Charge leicht variieren.

Follow @astrolighting



